

10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS

KITZ Fig: 10UTBD

Sizes: 1/2-8inch(15-200mm)

ANTI-STATIC DEVICE, FULL BORE.

Standards

. End to End: ASME B16.10 CLASS 150

. End Connection: JIS B2220 10K

. Wall Thickness: ASME B16.34 CLASS 150

Test Standard

. KITZ STANDARD

Approvals

Japan Valve Manufacturer's Association 15-200 mm (1/2-8 inch)
approved

Dimensions

SIZE(inch/mm)	L	L1	H	D1	Kg
1/2 15	108.0	0.0	102.0	130.0	0.00
3/4 20	117.0	0.0	105.0	130.0	0.00
1 25	127.0	0.0	124.0	160.0	0.00
1 1/4 32	140.0	0.0	128.0	160.0	0.00
1 1/2 40	165.0	0.0	113.0	230.0	0.00
2 50	178.0	0.0	120.0	230.0	0.00
2 1/2 65	190.0	0.0	154.0	400.0	0.00
3 80	203.0	0.0	163.0	400.0	0.00
4 100	229.0	0.0	197.0	460.0	0.00
5 125	356.0	0.0	217.0	460.0	0.00
6 150	394.0	0.0	291.0	1000.0	0.00
8 200	457.0	0.0	355.0	1500.0	0.00

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr. CF8/SCS13A
BODY CAP	STAINLESS STEEL	A351 Gr. CF8/SCS13A
STEM	STAINLESS STEEL	304SS
BALL	STAINLESS STEEL	A351 Gr. CF8/SCS13A


Specifications

10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS, ANTI-STATIC
DEVICE, FULL BORE.

End to End : ASME B16.10 CLASS 150, End Connection : JIS B2220
10K, Wall Thickness : ASME B16.34 CLASS 150, Test Standard : KITZ
STANDARD, Sizes : 1/2-8inch(15-200mm), Approvals : Japan Valve
Manufacturer's Association 15-200 mm (1/2-8 inch), BODY MATERIAL
: STAINLESS STEEL, BODY CAP MATERIAL : STAINLESS STEEL, STEM MATERIAL
: STAINLESS STEEL, BALL MATERIAL : STAINLESS STEEL, KITZ Fig : 10UTBD



JV

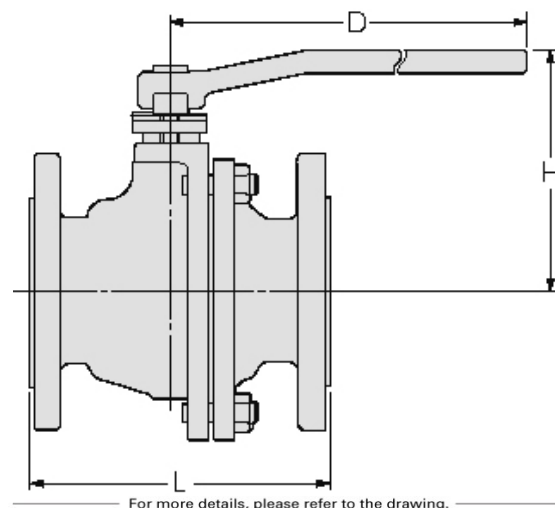


For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989

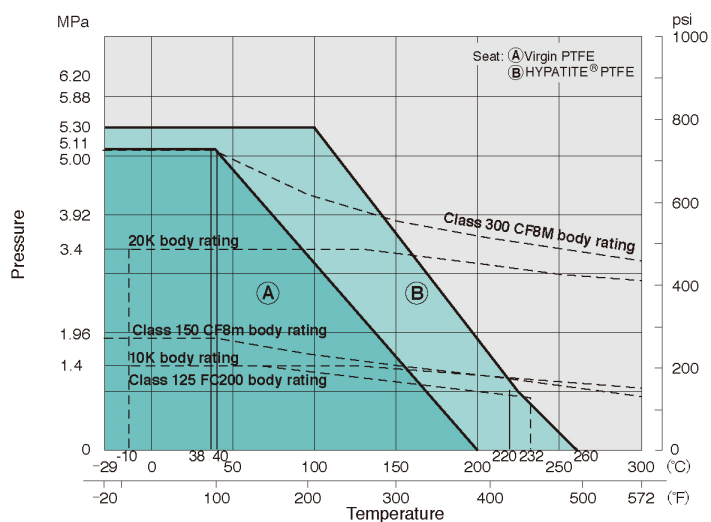

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of Kitz products introduced in this catalog. For any specific application, users are kindly requested to contact Kitz Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.



KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

